


# EcoPrO<sub>3</sub><sup>™</sup> 75S *Ozone Antimicrobial Treatment System*

The EcoPrO<sub>3</sub>-75S is a state-of-the-art aqueous ozone antimicrobial treatment system designed for surface sanitation of products and equipment in multiple industries, including food and beverage. The system is capable of producing up to 75 gallons per minute of aqueous ozone solution (ozone dissolved in water) at up to 10.0 PPM. FDA, USDA, and Organic Program approved, the EcoPrO<sub>3</sub>-75S provides a more effective, environmentally friendly alternative to traditional chemical sanitation.



## SPECIFICATIONS

System Control	PLC with Touchscreen HMI
Remote Monitoring	Included (Operations & Diagnostics)
Aqueous Ozone Output	Up to 10.0 PPM
Aqueous Ozone Flow	Up to 75.0 GPM
Ozone Injection Pump	Included
Process Supply Pump	Included
Cooling Method	Air Cooled
Aqueous Ozone Monitor	Included (Dissolved Ozone)
Ambient Ozone Monitor	Included
Makeup Water Requirement	Up to 75.0 GPM @ 40 PSI
Makeup Water Quality	Potable, Mineral Free, Temperature ≤75F
Power Requirements	Ozone: 240VAC, 1-Ph, 15A Pumps: 460VAC, 3-Ph, 20A
Enclosure Rating	NEMA-3R
Materials	316SS Sanitary
Dimensions	62.5" L x 35.5" W x 78.5" H

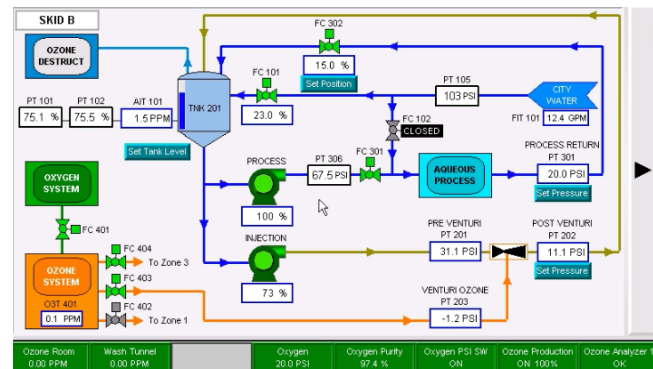

Advanced  
**OZONE**  
 3  
 Integration<sup>™</sup>

**U.S. Headquarters:**  
 2580 El Camino Real  
 Atascadero, CA 93422  
 Phone: (805) 464-2107

**Canada Headquarters:**  
 540 Newbold Street  
 London, Ontario / N6E 2S5  
 Phone: (519) 204-2909